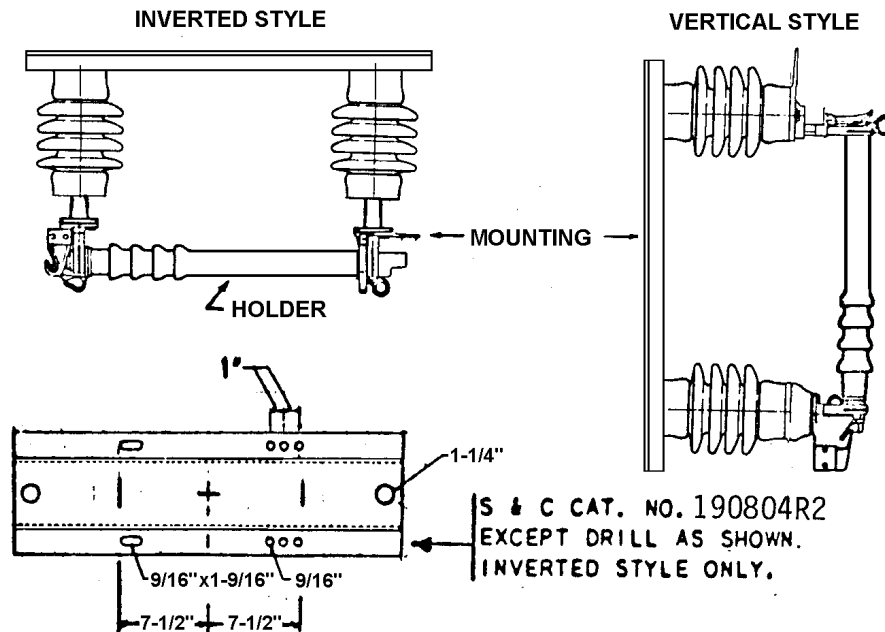


MATERIAL STANDARD**FUSES, HOLDERS AND MOUNTINGS 26-KV UNIT SUBSTATIONS & HEAVY INDUSTRIAL SUBSTATIONS**

Power Fuses, Holders, and Mountings of the types shown are used on 26-kV unit substations and heavy industrial substations of 2,500 to 10,000 kVA, 3 Ø capacity. Insulators shall be standard station post type conforming to the requirements of ANSI C29.9 for wet process porcelain. Glaze color shall be sky gray, ANSI No. 70.

Stock Unit: Each

Stock Number	Item	Item No.*	Amps	Style	Mfr. & Cat. No.	For Use with Item No. *
682847	Mounting	M-1	300 Max	Inverted	S&C 190804R2	H-1
682871	Mounting	M-2	300 Max	Vertical	S&C 190604R2	H-2
682415	Holder	H-1	300 Max	Inverted	S&C 86194R2	M-1, F-2, F-3
682403	Holder	H-2	300 Max	Vertical	S&C 86154R2 †	M-2, F-2, F-3
684711	Fuse	F-2	250E	SM-5	S&C 134400R4	H-1, H-2
684714	Fuse	F-3	300E	SM-5	S&C 264500R4	H-1, H-2

* Item No. indicates assembly combinations.

Old-style Cat. No. 86154 with addition of new-style pull rings will interchange with No. 86154R2.

ORIGINATOR

Jim S. Horn

STANDARDS COORDINATOR

Charles L. Shaffer

STANDARDS SUPERVISOR

John C. Hinner

UNIT DIRECTOR

Betty Robin